


3607

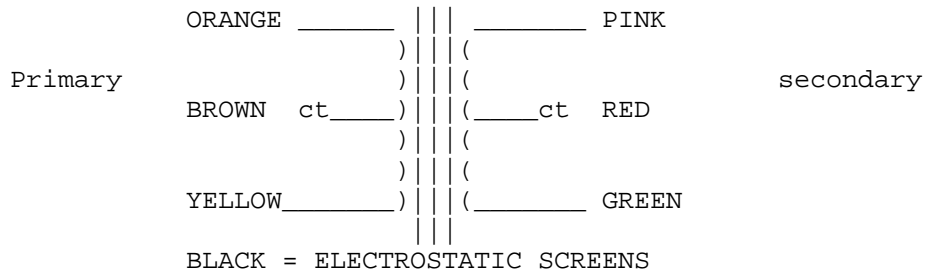

600ohm/600ohm,
Turns ratio 1:1,
Frequency response $\pm 0.5\text{dB}$ 20Hz -20kHz.
To handle 20dB level at 20Hz.

The 8 wire version is just a split winding on the secondary which can be joined in Series to give the above or in Parallel for 2:1 ratio

3607

