
<u>0616s</u>

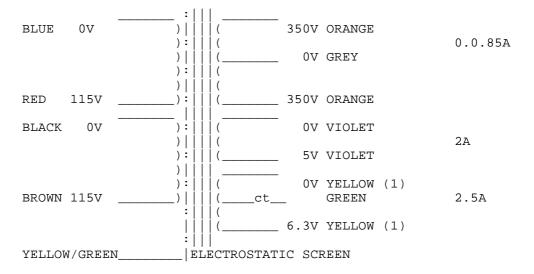

FOR FLEXIBLE LEADS PRIMARY AND SECONDARY:

Just cut short and isolate any spare connections

 ${\rm \underline{NOTE:}}$ A certain amount of mechanical hum is prevalent in mains transformers and can be amplified when bolting to your metal work. Therefore you may find a small rubber gasket or similar material is worth fitting to quieten this hum to its' minimum, but please ensure the frame is grounded to the supply safety earth.