


1429i

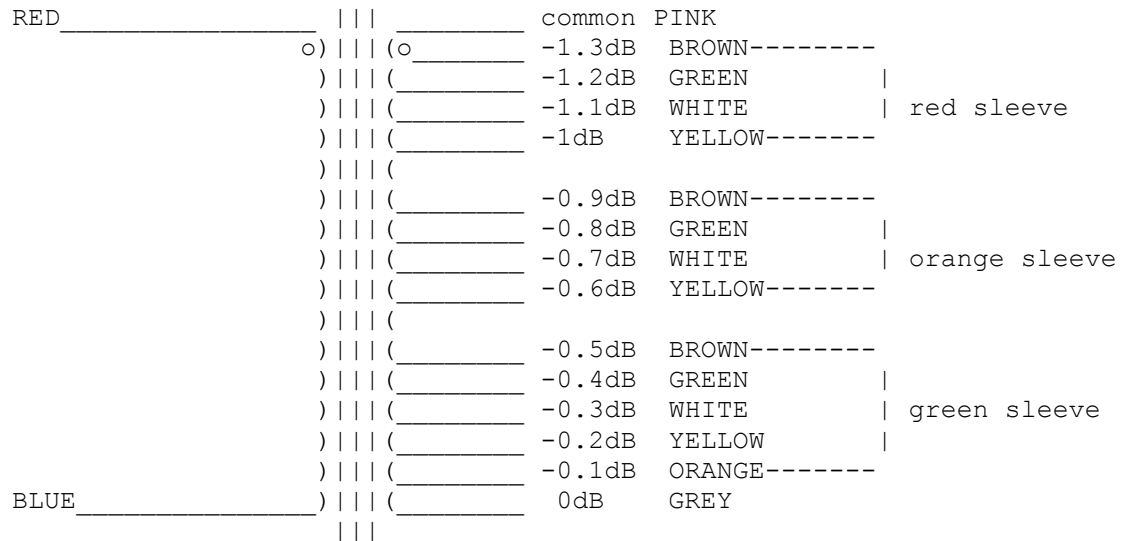

BLUE IS THE HOT SIDE OF THE PRIMARY

GREY (OR ANY TAP) IS HOT FOR SECONDARY

PINK WOULD NORMALLY BE THE COLD OF THE SECONDARY

1429 Attenuator for fine level adjustment. Plus or minus 1.3 dB in 0.1 db steps

A 600/600 attenuator with 1.3 dB in 0.1 dB steps on primary and secondary. Max level 14 dBu at 20 Hz.

Total dcr less than 180 Ohms. Better than 100 kHz bandwidth on all taps. Mumetal can with colour coded leads.