


**1926**

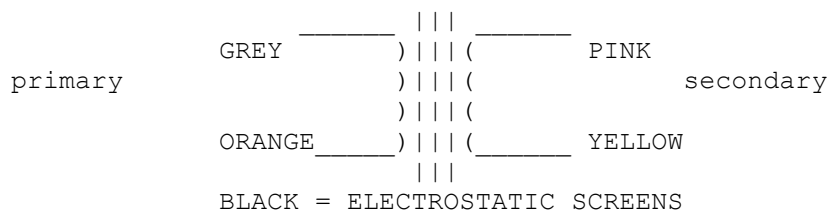


**1926 1:20 Low Z Cartridge Transformer**

Very high performance transformer for use with cartridges with an impedance in the range 3 to 10 ohms. Ideal for low output cartridges. Cartridge loading adjustable with secondary load resistor. Bandwidth 3 Hz to 100 kHz.

Two transformers are required for stereo.

Can with rubber grommet and M3 threaded holes

**1926z**

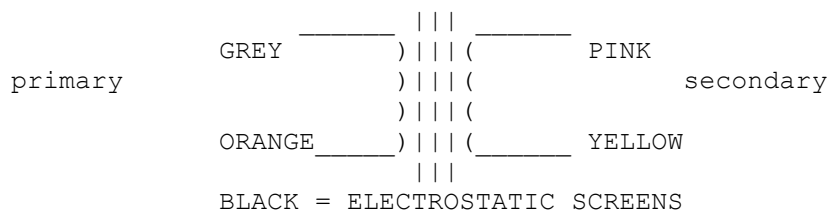

**1926 1:20 Low Z Cartridge Transformer**

Very high performance transformer for use with cartridges with an impedance in the range 3 to 10 ohms. Ideal for low output cartridges. Cartridge loading adjustable with secondary load resistor. Bandwidth 3 Hz to 100 kHz.

Two transformers are required for stereo.

Can with rubber grommet and M3 threaded holes

[OCC wire option](#)