



## Connection Information

Type: **8966**

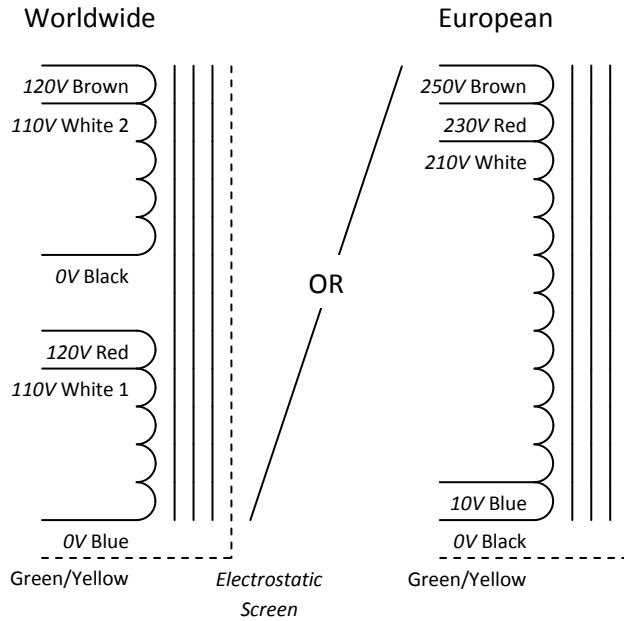

### Secondary

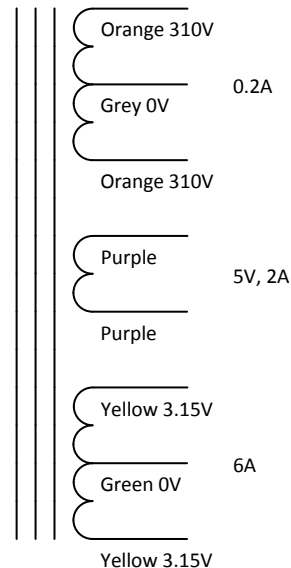

#### Notes

Visual identification – Worldwide version has two white leads, European version has one.

#### Worldwide connection options:

110v – N: join Blue and Black, L: join White 1 and White 2, isolate Red and Brown

120v – N: join Blue and Black, L: join Red and Brown, isolate White 1 and White 2

240v – N: Blue, L: Brown, join Red and Black, isolate White 1 and White 2 SEPERATELY FROM EACH OTHER

#### European connection options:

For mains voltages of 210v, 230v or 250v use Black as Neutral. For 200v, 220v or 240v, use Blue.

ALWAYS isolate all unused leads SEPERATELY FROM EACH OTHER.

A certain amount of operational hum is prevalent in mains transformers, which may be amplified when fixed to metalwork. A rubber gasket, washers or similar may be desirable to quieten this, however a good connection **MUST** be maintained between the transformer and the supply Earth.

**⚠ DANGER! – Electricity can kill! ⚠**

Only work with electricity if you are suitably qualified or experienced