


**3497**

150 ohms or 600 ohms / 600 ohms  
Turns ratio 1+1:2  
Max. Level 7rms at 30Hz - 20kHz.  
Frequency response  $\pm 0.5\text{dB}$  30Hz-20kHz

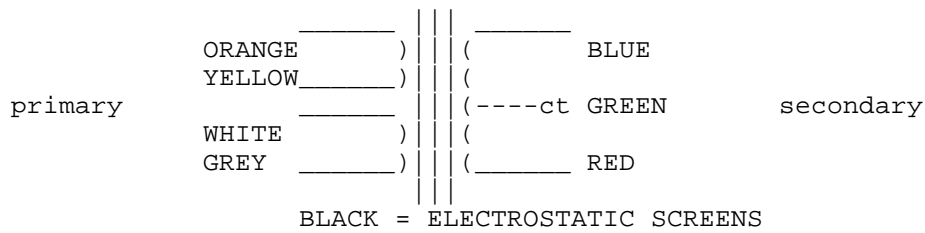

Primaries joined in series for 600 ohms use.

Primaries joined in parallel for 150 ohms use.

Supplied in a Mumetal can 45mm diam x 52mm high. Leads exit top of can through a rubber grommet. Two M3 threaded holes at 25mm centres in the bottom of the can