


3740

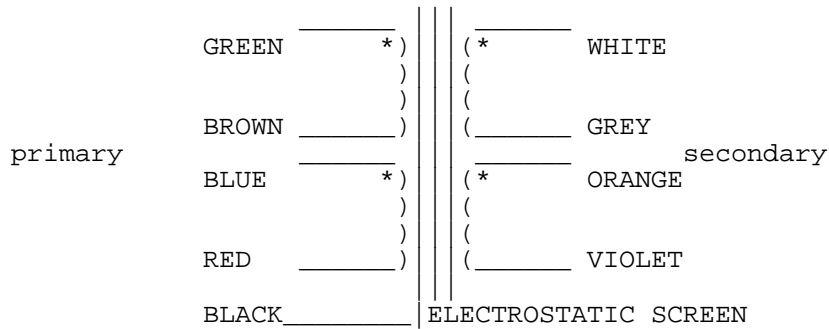

600 ohms/600 ohms Both primary and secondary are brought out in two halves which can be connected In series for 600 ohms or in parallel for 150 ohms.

With electrostatic screens.

Frequency Response +/-0.5dB 20Hz-20kHz.

Maximum Level 14.5Vrms at 30Hz. Ratio:1+1:1+1

Size 51mm high x 40mm x 60.5mm with fixing centres at 73mm.

* marks the start of each winding.