


4086

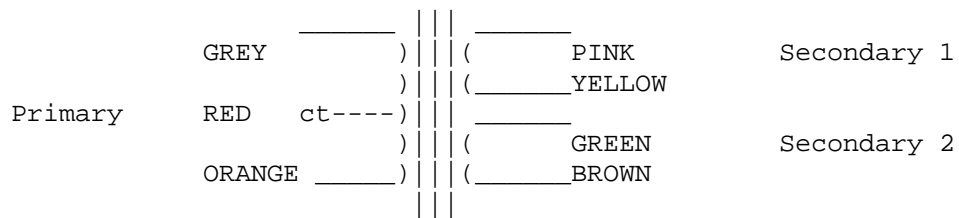

Primary: 200 ohms centre-tapped. Secondary: 600 ohms + 600 ohms.
Turns Ratio: 1:1.73 + 1.73 Maximum level: +5dBm at 30Hz.
Frequency response ±1dB 30Hz-20kHz. In a mumetal can.