


4916

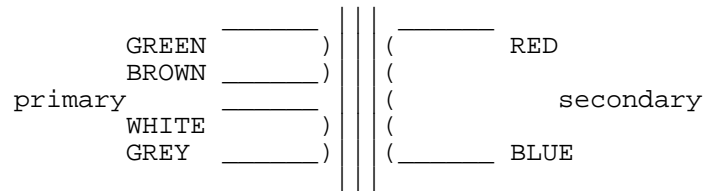

Primary Windings:

Series connected for 600 ohms use.

Parallel connected for 150 ohms use.

150+150/600CT Input/Output Transformer

100% Mumetal core..

Primary windings may be used in parallel for a 1:2 step up ratio or in series for a 1:1 ratio.

High level +18.5 dBu at 50 Hz in 600/600 configuration.

Quadrifilar wound, not suitable for high frequency common mode noise rejection.