


**5931**

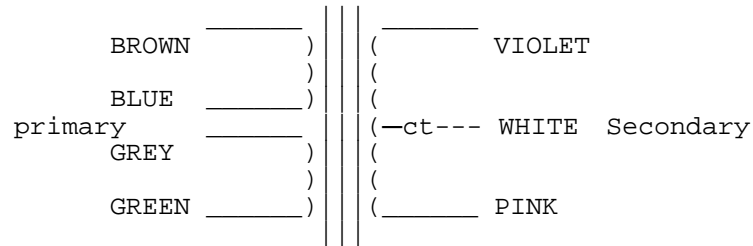

600ohm /600ohm, turns ratio 1:1,  
max level 2.75Vrms at 30Hz.  
With electromagnetic shielding (mumetal can),  
Quadrifilarly wound for best h/f response.  
Frequency response on a measured sample was -1dB,  
10Hz - 120kHz,with source and load both 600ohm and  
input voltage 0dBr.