


6389

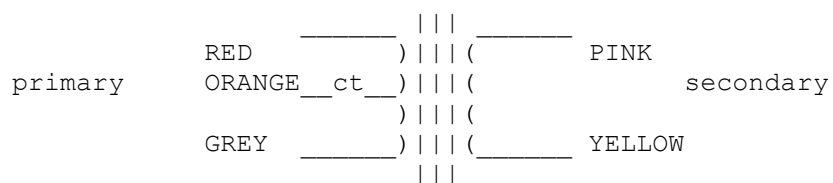

200 ohms primary centre-tapped / nominal 50k ohms secondary

Turns ratio 1:8

Frequency response at least 20Hz - 20kHz +/- 0.5dB

Fitted in Mumetal screening can.