


## **OUTPUT WINDINGS.**

There are FOUR EQUAL SECONDARY WINDINGS which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

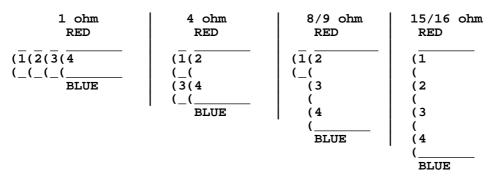

Type 7796: 100W Push-Pull Output Transformer

Primary Impedance: 4000 ohms

Secondary Impedance: 16/8/4 or 1 ohms

Frequenccy Response: 20Hz-20kHz
DC Current: 200mA per side