


8795

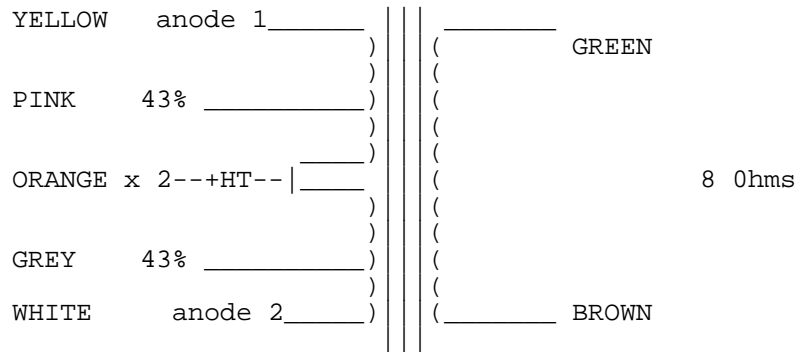

SOWTER TYPE	VALVE TYPE	Configuration	RLa-a ohms	Secondary impedance (standard) ohms	P Watts	Lowest freq for full power	dc per side mA	LF -3 dB Hz	HF -3dB kHz
8795	EL84	Pentode or UL 43%	8k0	8	10	30	80	25	30

Should you require any further technical advice, then please contact our Tech. Support by phone. +44 1962 620 135 or e-mail support@sowter.co.uk