


9045e

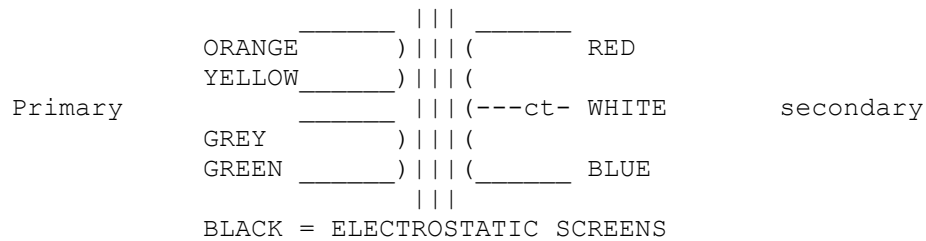


9045 50+50/5k Microphone input

Recording quality microphone transformer. Minimal microphone loading and distortion.
Full geometric balance in and out. Microphone sees 1k over wide frequency band.
Can be used with primary windings in parallel for 50 ohm mics and in series for 200 ohm mics.
+18 dBu

[Data sheet available on the website www.sowter.co.uk](http://www.sowter.co.uk) search 9045 and follow then links

9045g (Octal)

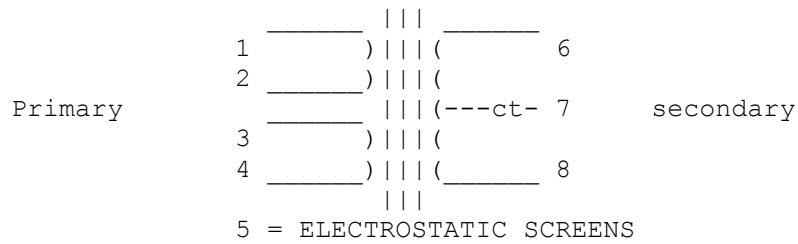

Data sheet available on the website www.sowter.co.uk search 9045 and follow the links

9045 50+50/5k Microphone input

Recording quality microphone transformer. Minimal microphone loading and distortion.

Full geometric balance in and out.

Microphone sees 1k over wide frequency band.

Can be used with primary windings in parallel for 50 ohm mics and in series for 200 ohm mics. +18 dBu