


## TYPE 1010b

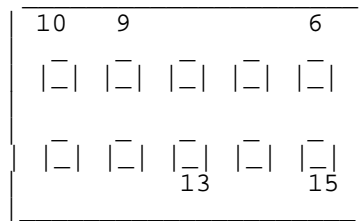

### **1010 Teletronix LA-2A 1968 15K/600 Line op.**

Ratio 5:1. 15k/600 ohms output transformer for driving balanced line from ac coupled cathode follower or SRPP circuit.

Total dc resistance ref secondary 30 ohms. Colour coded leads (Type **1010A**) or PCB pins (Type **1010B**).



Size A. Max output level +30 dBu. 50% Mumetal core for exceptional bandwidth and dynamic range.

Similar to UTC A24 and Triad HS-50 (in overall 5:1 configuration) but with improved bandwidth.

Fits Drip Electronics OPTO 4 PCB

9/16 18

4 BOLT HOLES IN CORNERS OF LAMINATIONS FOR ADDITIONAL MOUNTING  
AT 48mm x 38.5mm (4mm DIAMETER)

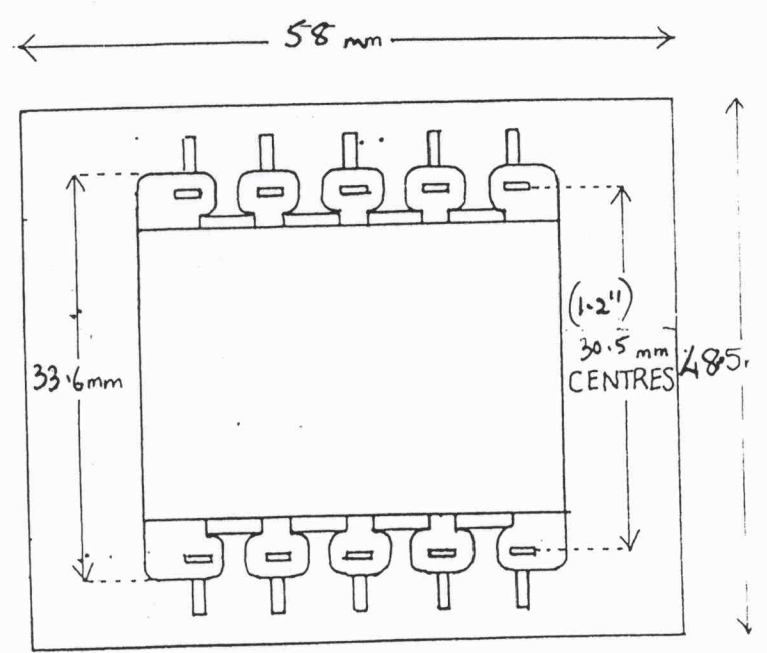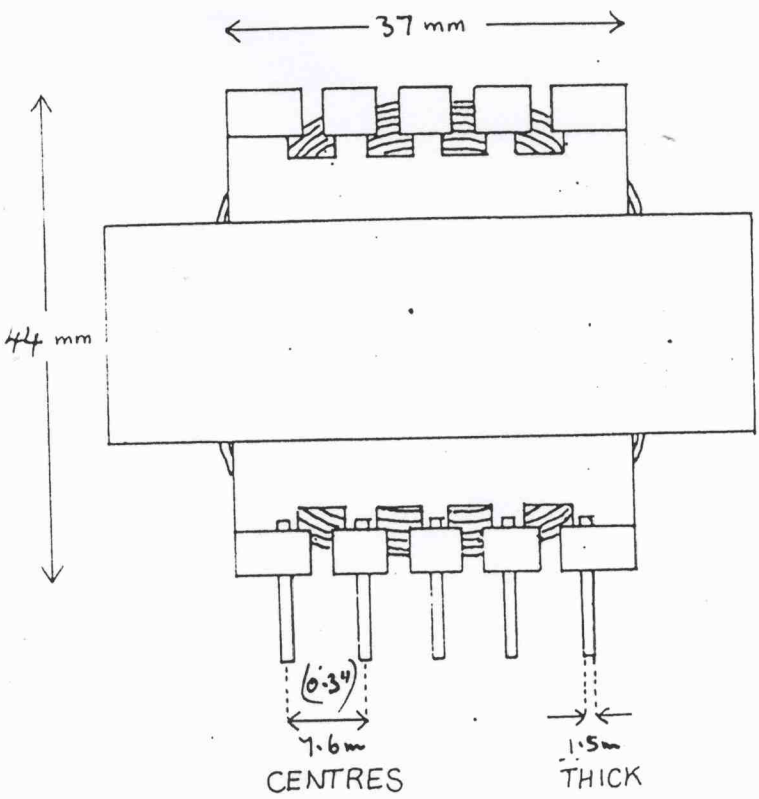

PIN DIMENSIONS

TBS-903  
Matl: 0.020"

