


1290e

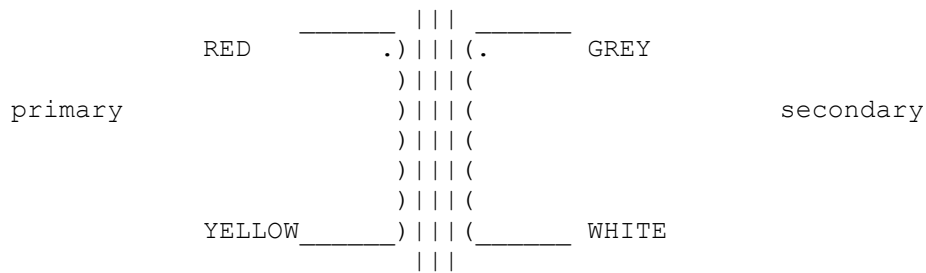

1290 Teletronix LA-2A 1968 15K/600 Line op.

Ratio 5:1. 15k/600 ohms output transformer for driving balanced line from ac coupled cathode follower or SRPP circuit. Total dc resistance ref secondary 31 ohms. Colour coded leads and threaded grommet mounting. Max output level +30 dBu. 30% Mumetal core for exceptional bandwidth and dynamic range. Similar to UTC A24 and Triad HS-50 (in overall 5:1 configuration) but with improved bandwidth. Suitable for [Drip Electronics Opto 4 and 5 PCB](#)

To view data sheet go to www.sowter.co.uk search 1290 click 1290 then click data sheet