


1304f



12.1 dBu AUDIO TRANSFORMER type number 1304
Similar to Neumann U67 as discussed with Brian Sowter
Primary impedance 9800 Ohms. Secondary impedance 200 Ohms.
LF Cut off -0.5 Db at 20Hz. Source 2000 Ohms
Turns ratio 7:1 (nfb approx 33% of secondary) with electrostatic and
electromagnetic screening. Mumetal Can 34mm diam x 24mm high with 2x M3 threaded
holes at 19mm centres for mounting (screws should enter transformer maximum 3mm)
Colour coded leads.

Test result for 1304 with 2kohm source and 200ohm load

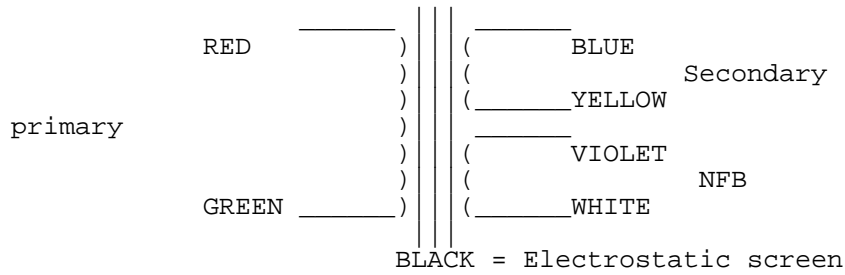