




Connection Information

Type: 9232

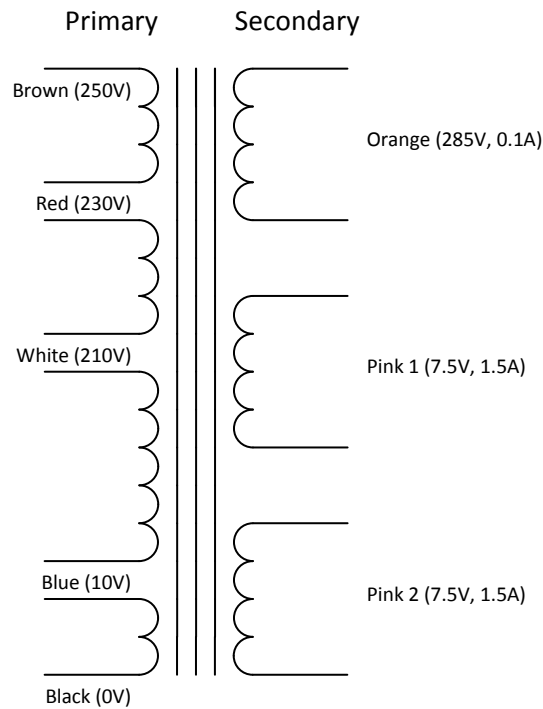

For other input voltages, use 10V tap instead of 0V terminal:
240V – Blue to Brown 220V – Blue to Red 200V Blue to White

Further Information:

For Primary with solid-core wire and sleeving – note the Primary is built up in sections so wire pairs preceding the required voltage MUST be joined to complete the circuit. Spare connections not required should be cut short and isolated, colour pairs individually joined. The wire is polyurethane-coated so must be stripped and tinned if the leads are to be shortened.

For Primary with flexible leads – spare connections not required can just be cut short and isolated.