


1480e

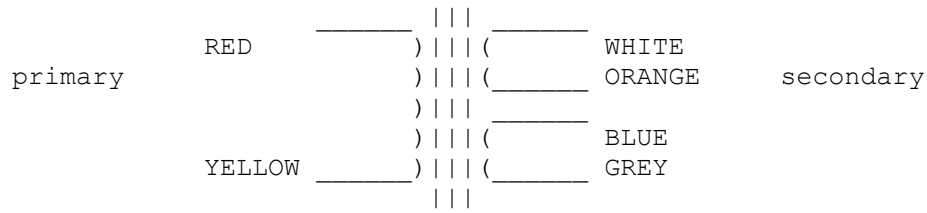

1480 Studio phono cartridge transformer. 1:10. 100% balance. Replaces 8055
Ratio 1:10 with full geometric balanced inputs and outputs. Biphase output for driving push-pull pre-amps. Two chamber bobbin ensures 100% amplitude and phase balance over the full bandwidth. Can be used with normal unbalanced input. For cartridges in the range 3 to 15 ohms 5 Hz to 80 kHz. Configurable for 1:5 ratio by connecting the two secondary windings in parallel. DC resistance Primary: 0.3 Ohms. Secondary 60 Ohms. Two transformers are required for stereo. Mumetal can.