



# 9535

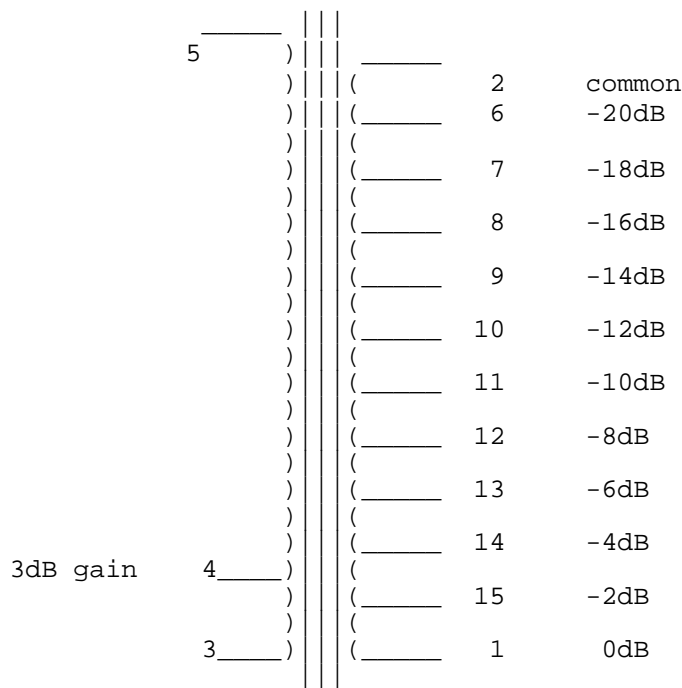

Pin 3 is hot side of Primary  
 Pin 1 or any tap is hot side of Secondary  
 Pin 2 is normally the cold side of the Secondary

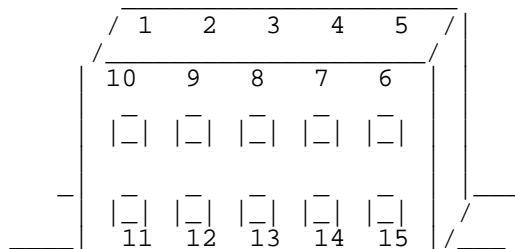

**9535 Super Tweeter Attenuator 20 dB in 2 dB steps**

A 1:1 transformer for use with 4,8,or 16 ohm treeters. Eleven secondary taps provide frequency balancing in a loudspeaker system with a bandwidth up to 100KHz. A primary tap is provided to provide a 3 dB step up. Up to 50W at 400 Hz. 100% Mumetal core for minimal distortion and 100 dB dynamic range. Solder tags.