



**1715**

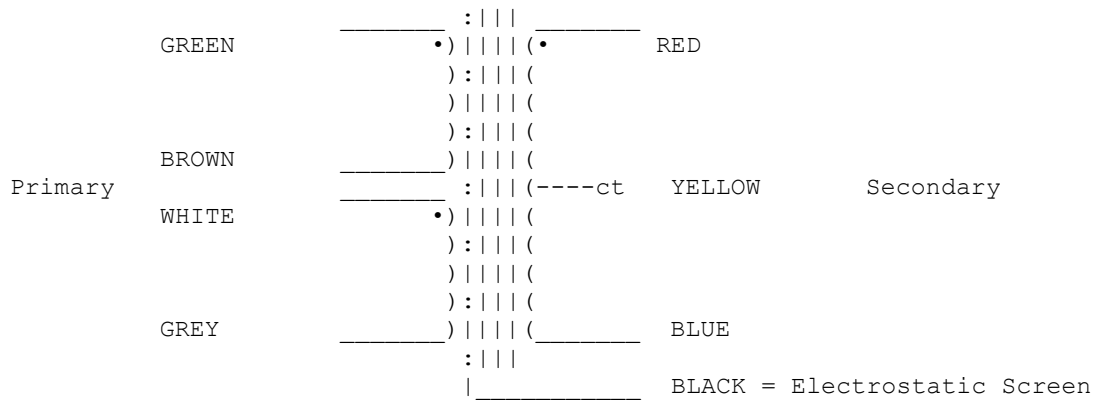

**1715** Mic to Line transformer 150 or 600 Ohms. Replacement for Gardners MU7524. Replaces 3257

150 +150 / 600CT input transformer. Configurable for 150/600CT Ohms or 600/600CT Ohms.  
100% Mumetal core and can. Internal electrostatic shields for maximum noise rejection.  
A very high spec transformer with excellent bandwidth, minimal distortion, high level capability with minimal insertion loss.  
Primary inductance (typical) 12.7 H, DCR 24 Ohms max.  
Secondary DCR 24 Ohms max.  
Max input level +21 dbu at 50 Hz.

**1715g**

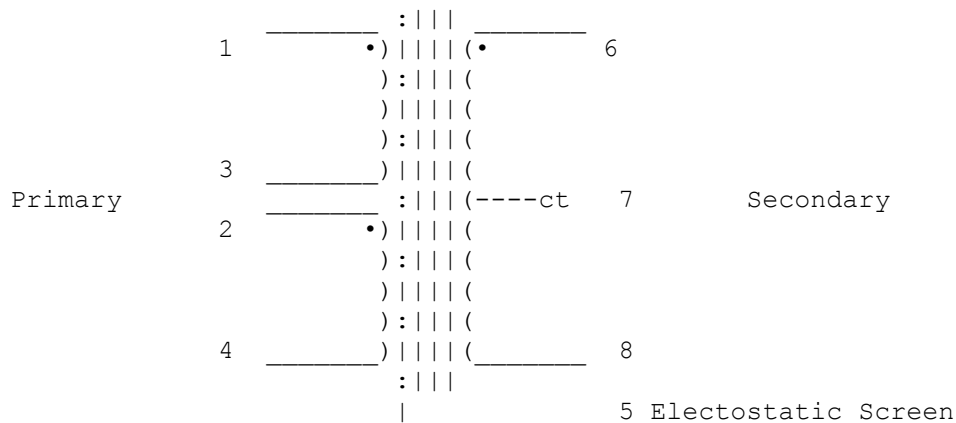

**1715** Mic to Line transformer 150 or 600 Ohms. Replacement for Gardners MU7524. Replaces 3257

150 +150 / 600CT input transformer. Configurable for 150/600CT Ohms or 600/600CT Ohms.  
100% Mumetal core and can. Internal electrostatic shields for maximum noise rejection. Available with octal base if required. A very high spec transformer with excellent bandwidth, minimal distortion, high level capability with minimal insertion loss.  
Primary inductance (typical) 12.7 H, DCR 24 Ohms max.  
Secondary DCR 24 Ohms max.  
Max input level +21 dbu at 50 Hz.  
Operating temperature -20° to +80°C