



SA08s

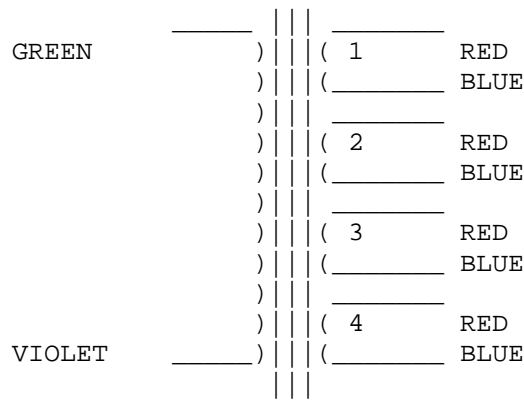

OUTPUT WINDINGS.

There are FOUR EQUAL SECONDARY WINDINGS which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

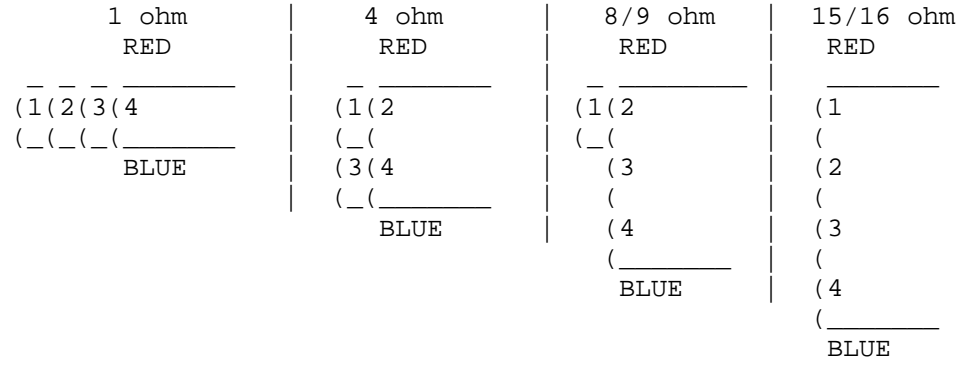

SA08 SE Output for 300B

3500 ohms, 20 Watts at 15 Hz, 100 mA, 15 Hz to 70 kHz, Size P. Very conservative design allowing low copper loss and a substantial power margin for low distortion.

Data sheet available at <http://www.sowter.co.uk/specs/sa08.htm>