



**UA23**

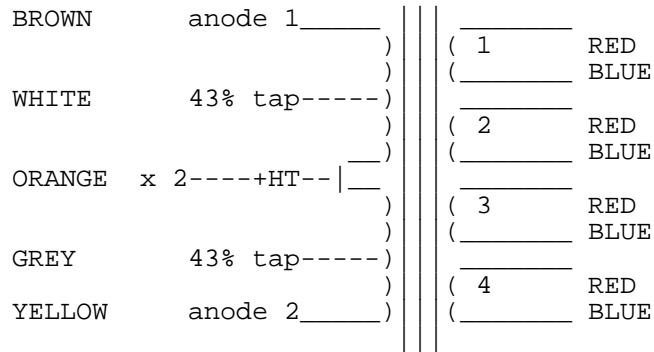

**OUTPUT WINDINGS.**

There are FOUR EQUAL SECONDARY WINDINGS which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

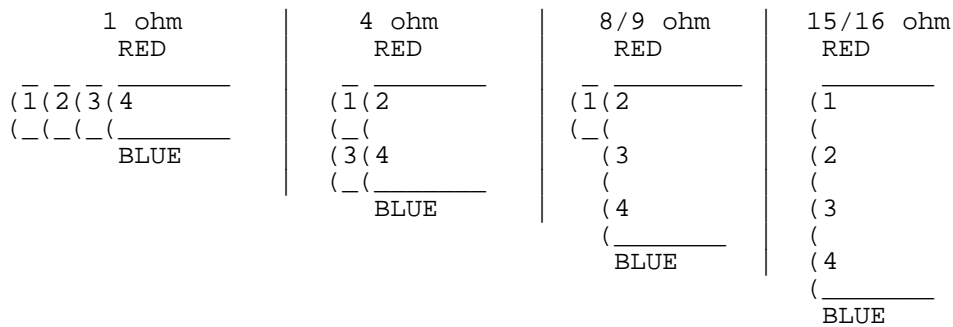

**UA23 PP Output for KT66 UL Cathode bias**

8000 ohms R1a-a. 30W at 15 Hz. 125 mA per side. For UL or Tetrode cathode bias. 20 Hz to 30 kHz. Size N Suitable for LEAK TL12, TL25 PP OUTPUT.