


UK64

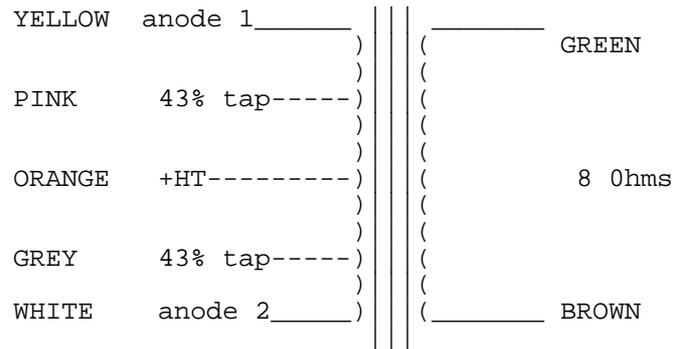

SOWTER TYPE	VALVE TYPE	Configurat ion	RLa-a ohms	Secondary impedance (standard) ohms	P Watts	Lowest freq for full power	dc per side mA	LF -3 dB Hz	HF -3dB kHz
U064	EL84	Pentode or UL 43%	8k0	8	10	30	80	25	30