

UL79



OUTPUT WINDINGS.

There are \underline{FOUR} \underline{FOUR} \underline{FOURL} $\underline{SECONDARY}$ $\underline{WINDINGS}$ which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

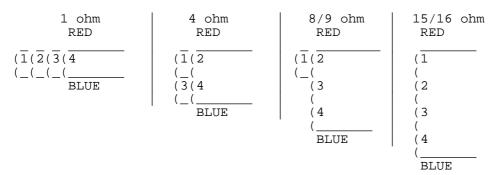

UL79 P Output for 300B Class A

5000 ohms Rla-a. 30W at 20 Hz. 150mA per side. 10 Hz to 40 kHz. Size M