



UL82

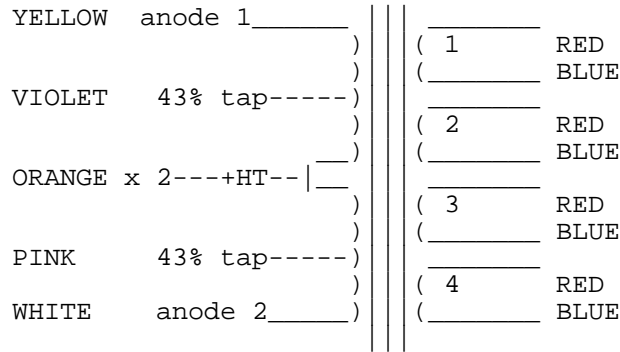

OUTPUT WINDINGS.

There are FOUR EQUAL SECONDARY WINDINGS which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

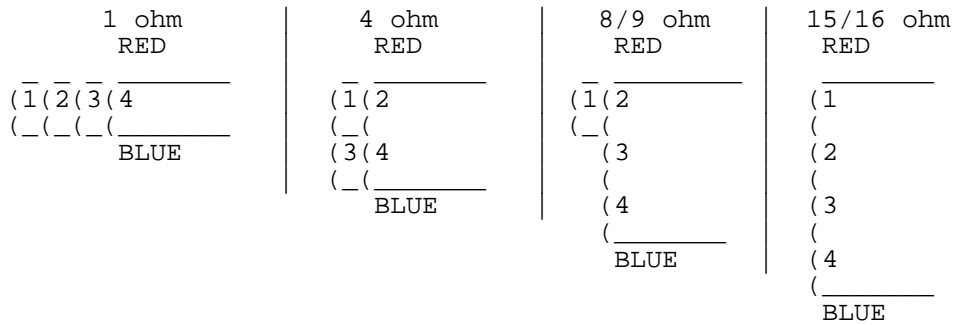

UL82 PP output for EL84 UL

8000 ohms Rla-a. 40 W at 20 Hz. 200 mA per side. Also suitable for KT66, 6CA7 etc. Very high bandwidth. 10 Hz to 80 kHz. Size P