



**UX27s**

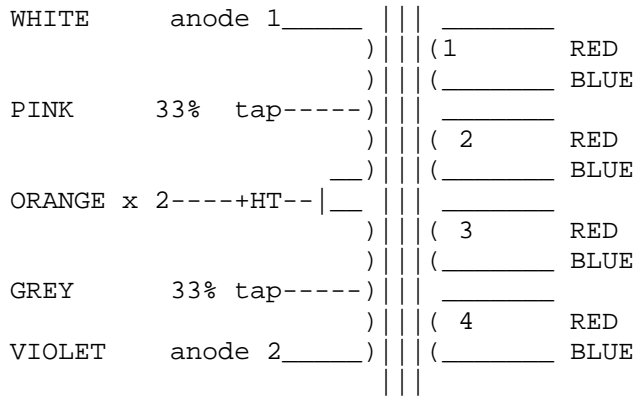

**OUTPUT WINDINGS.**

There are **FOUR EQUAL SECONDARY WINDINGS** which can be arranged for loads of **1, 4, 8/9 or 15/16 ohms** thus:-

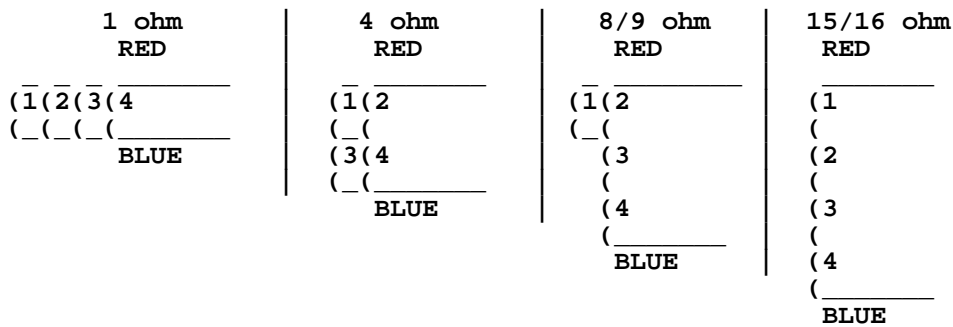

**U027x PP Output for KT88 Fixed bias**

5000 ohms R1a-a. 50W at 20 Hz. 180 mA per side. 33% UL taps.  
For KT88 or 6550 Fixed bias for circuit in GEC application report 3. 10 Hz to 50 Hz.  
Size N