


UX64

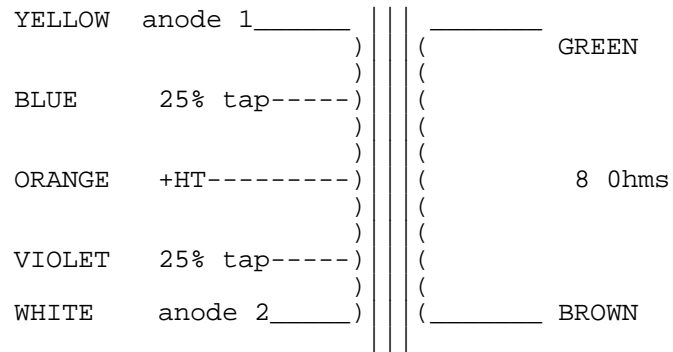

| SOWTER TYPE | VALVE TYPE | Configurat ion | RLa-a ohms | Secondary impedance (standard) ohms | P Watts | Lowest freq for full power | dc per side mA | LF -3 dB Hz | HF -3dB kHz |
|-------------|------------|-------------------|------------|-------------------------------------|---------|----------------------------|----------------|-------------|-------------|
| UX64 | EL84 | Pentode or UL 25% | 8k0 | 8 | 10 | 30 | 80 | 25 | 30 |