


9780

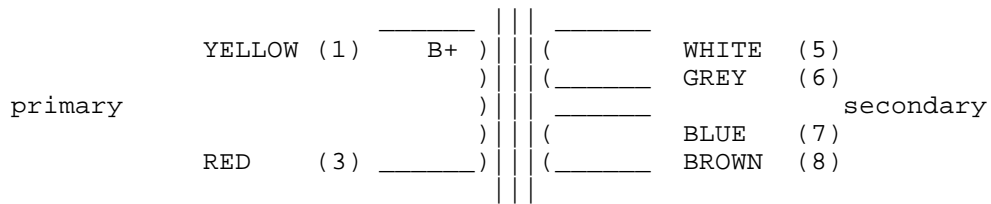

The brackets signify the numbers on the Neve circuit

For use with Neve 183AM card

9780 Neve Line Output

Ratio 1:1.5. Sowter replacement design for Neve P/N L02567/Marinair T1801.

Ungapped version of P/N L01166 for Neve 183AM card which provides two separate outputs. Must be connected to pin "F" and used in conjunction with Sowter 8751. Max output level +30 dBu. Total dc resistance ref secondary 39 ohms. Size "OB" (Width 46 mm)

This is a technical point and only applies when used in conjunction with the Neve card. DC current is not permitted in 9780 so you have to connect it to pin A which has an isolating capacitor. The dc in the Neve circuit flows in the 8751 which does permit dc. It is simply a Neve way to get 2 isolated outputs from this card.