



UA21

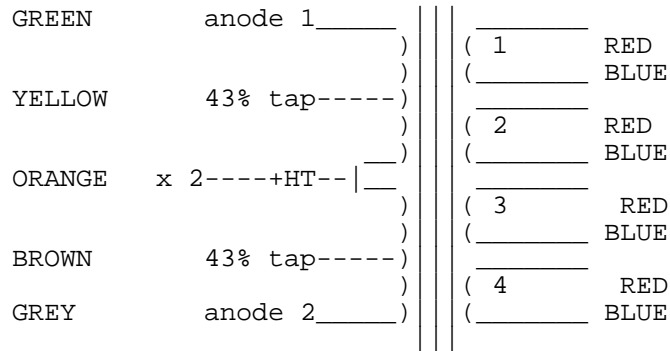

OUTPUT WINDINGS.

There are FOUR EQUAL SECONDARY WINDINGS which can be arranged for loads of 1, 4, 8/9 or 15/16 ohms thus:-

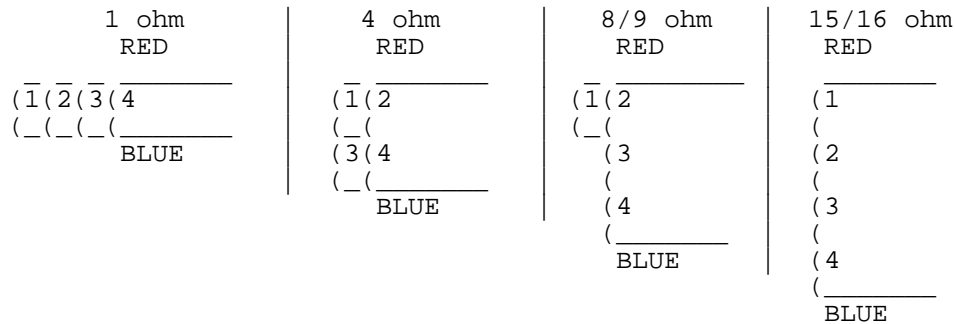

UA21 PP Output for EL34 UL 43% taps

6600 ohms Rla-a. 40 W at 20 Kz. 120 mA per side. 20 Hx to 40 kHz..

Suitable for MULLARD 20W, LEAK STEREO 20 EL34 PP AMP and DYNACO STEREO ST70 AMP.

Size N

There is a datasheet on our website www.sowter.co.uk search UA21 then follow the links.