





**Connection Diagram**

**Type: 0678**


**EU Primary**

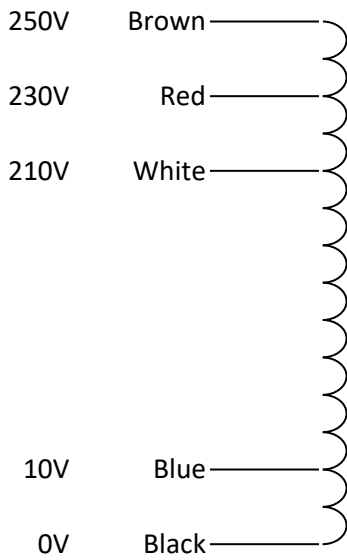

**WW Primary**

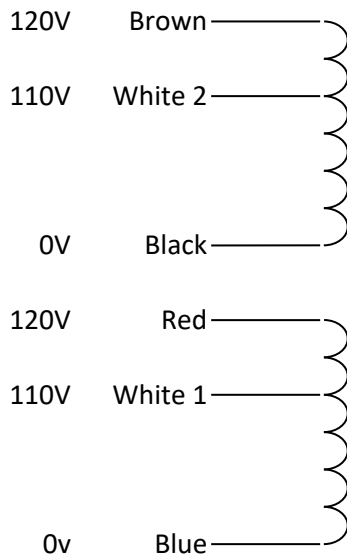

**OR**

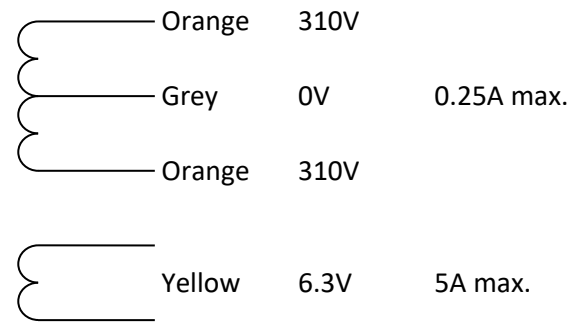

**Notes**

Visual identification – Worldwide version has two white leads, European version has one.

**Worldwide connection options:**

- 110v – N: join Blue and Black, L: join White 1 and White 2, isolate Red and Brown
- 120v – N: join Blue and Black, L: join Red and Brown, isolate White 1 and White 2
- 240v – N: Blue, L: Brown, join Red and Black, isolate White 1 and White 2

**European connection options:**

For mains voltages of 210v, 230v or 250v use Black as Neutral. For 200v, 220v or 240v, use Blue.

ALWAYS isolate all unused leads SEPERATELY FROM EACH OTHER

Please Note: A certain amount of operational hum is prevalent in mains transformers, which may be amplified when fixed to metalwork. A rubber gasket, washers or similar may be desirable to quieten this, however a good connection MUST be maintained between the transformer and the supply Earth.