

E8757

BLACK	0V	_____)		(_____	360V ORANGE	
				(_____		
				(_____	50V PINK	
BLUE	10V-	_____)		(_____		
		JOIN* _		(_____	0V GREY	400mA
				(_____		
				(_____		
				(_____		
				(_____	360V ORANGE	
				(_____		
WHITE	210V-	_____)		(_____	0V YELLOW	
		JOIN* _		(_____		3.5A
				(_____		
				(_____	6.3V YELLOW	
RED	230V-	_____)		(_____	0V YELLOW	
		JOIN* _		(_____		3.5A
				(_____		
BROWN	250V	_____)		(_____	6.3V YELLOW	
				(_____		
				(_____	0V VIOLET	
				(_____		2A
				(_____	5V VIOLET	

To obtain other inputs use as follows:

10V tap in place of 0V terminal thus:

BLUE/BROWN = 240V **BLUE/RED = 220V** **BLUE/WHITE= 200V**


*** FOR PRIMARY WINDING WITH SOLID CORE WIRE AND SLEEVING**

You will note that the Primary is built up in sections and the two wires in the Blue, White and Red sleeves **must always be individually joined** to make the primary circuit complete. **Spare connections not required** can be cut short, **each colour joined separately and isolated**. The solid wire inside the sleeving is coated with polyurethane and needs to be **stripped away and tinned** if the leads are shortened.

FOR FLEXIBLE LEADS PRIMARY - just cut short and isolate any spare connections

Note: A certain amount of mechanical hum is prevalent in mains transformers and can be amplified when bolting to your metal work. Therefore you may find a small rubber casket or similar material is worth fitting to quieten this hum to its' minimum, but please ensure the frame is grounded to the supply safety earth.

W8757

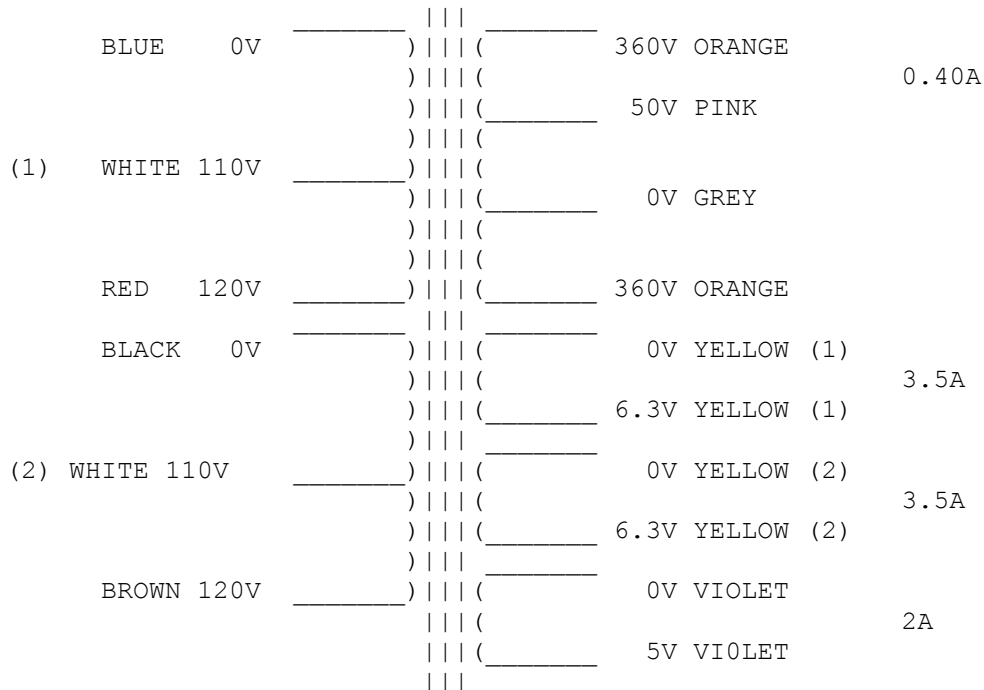

For 240V: Join RED & BLACK. Use BLUE & BROWN
(Isolate both WHITES separately)

For 120V: Join BLUE & BLACK 0V and join RED & BROWN 120V.
(Isolate both WHITES)

For 110V: Join BLUE & BLACK 0V and join both WHITES 110V.
(Isolate RED & Isolate BROWN)

If the White leads are cut short please ensure the TWO wires
inside the sleeving are joined together in BOTH cases.

Note: A certain amount of mechanical hum is prevalent in mains
transformers and can be amplified when bolting to your metal work.
Therefore you may find a small rubber gasket or similar material
is worth fitting to quieten this hum to its' minimum, but please
ensure the frame is grounded to the supply safety earth.